


| 6HX SERIES, SIX ELEMENT FLUOROPOLYMER (PTFE) HEATERS |       |                      |                            |              |                         |
|--|-------|----------------------|----------------------------|--------------|-------------------------|
| WATTS  | VOLTS | HOT ZONE<br>In./(mm) | OVERALL LENGTH<br>In./(mm) | MODEL NUMBER | SHIP WGT.<br>Lbs./ (kg) |
| 2000   | 120   | 9                    | 17                         | 6HX2117-1**  | 19                      |
|  | 240   | (230)                | (430)                      | 6HX2217-**   | (8.5)                   |
|  | 480   |                      |                            | 6HX2417-**   |                         |
| 3000   | 240   | 15                   | 23                         | 6HX3223-**   | 22                      |
|  | 480   | (380)                | (585)                      | 6HX3423-**   | (10)                    |
| 4000   | 240   | 21                   | 29                         | 6HX4229-**   | 24                      |
|  | 480   | (535)                | (735)                      | 6HX4429-**   | (11)                    |
| 6000   | 240   | 28                   | 35                         | 6HX6235-**   | 27                      |
|  | 480   | (710)                | (890)                      | 6HX6435-**   | (12.5)                  |
| 8000   | 240   | 38                   | 47                         | 6HX8247-**   | 33                      |
|  | 480   | (965)                | (1195)                     | 6HX8447-**   | (15)                    |
| 10000  | 240   | 47                   | 59                         | 6HX10259-**  | 40                      |
|  | 480   | (1195)               | (1500)                     | 6HX10459-**  | (18)                    |
| 12000  | 240   | 55                   | 68                         | 6HX12268-**  | 45                      |
|  | 480   | (1400)               | (1725)                     | 6HX12468-**  | (20.5)                  |

Three phase standard. Single phase available as option. Add "-1" before thermal protector designator.

## Product Features and Benefits:

- ◆ **SUPERIOR CHEMICAL RESISTANCE:** Inert to most aqueous acid, alkaline, anodizing and pickling solutions up to 212 °F (100 °C).
- ◆ **RUGGED CONSTRUCTION:** Heavy wall fluoropolymer (PTFE) covered stainless steel element reduces permeation and eliminates the need for gas purge systems. Guaranteed 100% pinhole free.
- ◆ **OUTSTANDING PERFORMANCE:** Low watt density design (10 watts/square inch, 1.5w/cm<sup>2</sup>) for long service life. Excellent choice for electroless chemistries.
- ◆ **CORROSION RESISTANT HEAD:** Vapor tight, flame retardant polypropylene terminal enclosure with 3-foot (.9m) flexible PVC liquid tight conduit.
- ◆ **SAFETY FEATURES:**
  - Grounded internal metal element.
  - Thermal protector built in. Replaceable PT-I fuse standard for solutions up to 190 °F (88 °C).
  - Non-floating construction.
- ◆ **CERTIFICATIONS:** UL, CSA, and CE.
- ◆ **SIZES:** 2,000 watts to 12,000 watts.
- ◆ **VOLTAGES:** 120, 240 or 480 volts. 208, 380, 415, 600 and other voltages available. Three phase standard, single phase available.
- ◆ **OPTIONS AVAILABLE** (consult factory):
  - Resettable thermal protectors:
    - PT-II bi-metal switch: for solutions up to 190 °F (88 °C).
    - PT-III type-J thermocouple for solutions from 190 °F (88 °C) to 210 °F (99 °C).
    - PIII type-J thermocouple for solutions from 210 °F (99 °C) to 250 °F (121 °C).
  - Polypropylene guards: recommended for applications up to 180 °F (82 °C).
  - Fluoropolymer (PTFE) guards: recommended for chromic acid or solutions over 180 °F (82 °C).
  - L-Shaped and other special configurations.
  - Longer wire and conduit lengths.
  - Lower watt densities for highly viscous solutions and technical acids.
  - Temperature and level controls sized to match the heater.

## DIMENSIONS

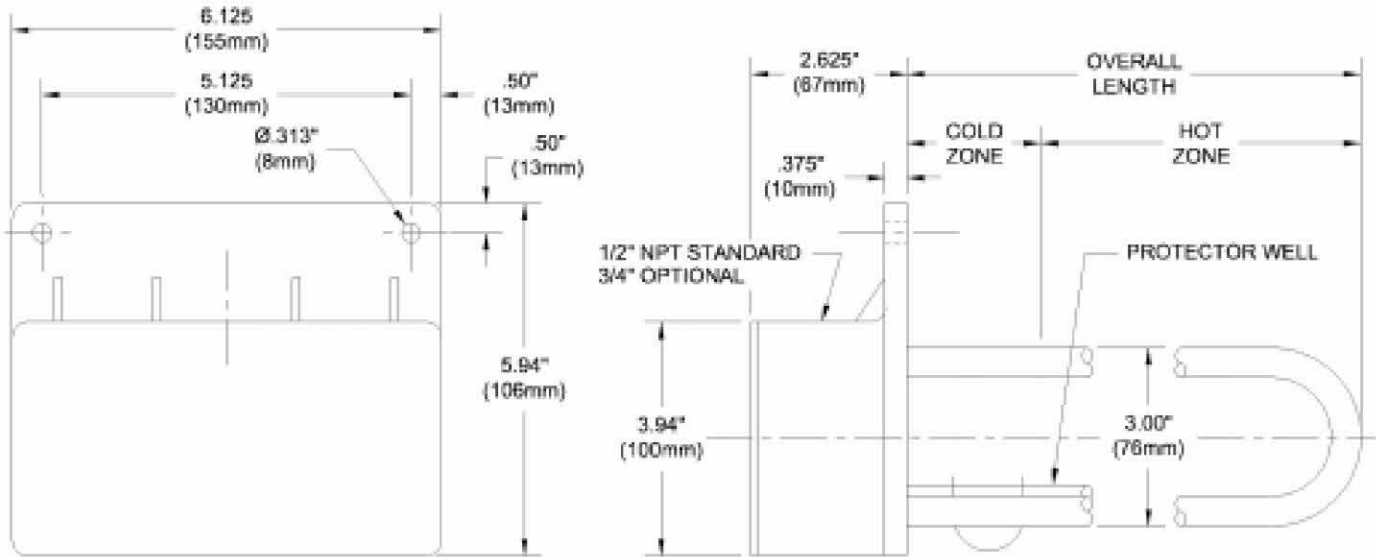

## 6 ELEMENT FLUOROPOLYMER (PTFE) HEATER

| Series | Wattage   | Voltage  | Overall Length  | Options | Type of Fuse                             | Wire and Conduit Length  |
|--------|---|--|---|---------|--|--|
|        | 2 = 2000<br>3 = 3000<br>4 = 4000<br>6 = 6000<br>8 = 8000<br>10 = 10000<br>12 = 12000  | 1 = 120<br>2 = 240<br>4 = 480<br>-208- = 208<br>-277- = 277<br>-380- = 380<br>-415- = 415<br>-600- = 600 | 17 = 2kW<br>23 = 13kW<br>29 = 4kW<br>35 = 6kW<br>47 = 8kW<br>59 = 10kW<br>68 = 12kW |         |  | 36" length standard<br>(no designator)<br>specify variations from standard<br>Ex: -X84 = 84" |
|        | 6HX = PTFE<br>6HS = 304 stainless steel   |  |   |         |  |  |
|        | X = any special configuration not called out in the number (specify in clear text)<br>-C = complete with guard<br>no designator = three phase power (standard)<br>-1 = single phase power |  |   |         |  |  |
|        |   |  |   |         | <b>Replaceable Fuse</b>                  |  |
|        |   |  |   |         | -PTI (std)                               | for solutions up to 190°F  |
|        |   |  |   |         | -PTIM                                    | for 190° - 220°F solutions   |
|        |   |  |   |         | <b>Resettable Fuse</b>                   |  |
|        |   |  |   |         | (additional control components required) |  |
|        |   |  |   |         | -PT-II                                   | for solutions up to 190°F  |
|        |   |  |   |         | -PT-III                                  | for 190° - 210°F solutions   |
|        |   |  |   |         | -PIII                                    | for 210° - 250°F solutions   |

### ORDERING EXAMPLE:

6HX8247C-PT-II

6 element, fluoropolymer, 8,000 watts, 240 volt, 47" overall length, complete with guard, PT-II fuse.

**PROCESS  
TECHNOLOGY**