

## PRODUCT BULLETIN




IX SERIES, INSULATORS			
SIZE (NPT)	LENGTH In./mm	MODEL NUMBER	SHIP WGT. Lbs./kg
1/2"	2" (51)	IX-5	1 (.5)
3/4"	2" (51)	IX-3	1 (.5)
1"	2-1/2" (63.5)	IX-1	1 (.5)
1 1/4"	2-1/2" (63.5)	IX-1-1/4	1 (.5)
1 1/2"	2-1/2" (63.5)	IX-1-1/2	1 (.5)
2"	2-1/2" (63.5)	IX-2	1 (.5)

## Product Features and Benefits:

- ◆ **APPLICATIONS:**
  - Protects metal heat exchangers and plating processes from stray voltage or current.
  - Prevents seizing between metal lines.
  - Dampens vibrations.
- ◆ **RUGGED CONSTRUCTION:** Fluoropolymer (PTFE) body with 316 stainless steel retainer ring for added structural integrity.
- ◆ **CAPACITIES:**
  - Sizes from 1/2-inch FNPT to 2-inch FNPT.
  - Maximum steam service: 50 PSIG.
- ◆ **OPTIONS AVAILABLE (consult factory):**
  - Titanium retainer rings.
  - Special lengths.
  - Metric sizes.

## DIMENSIONS

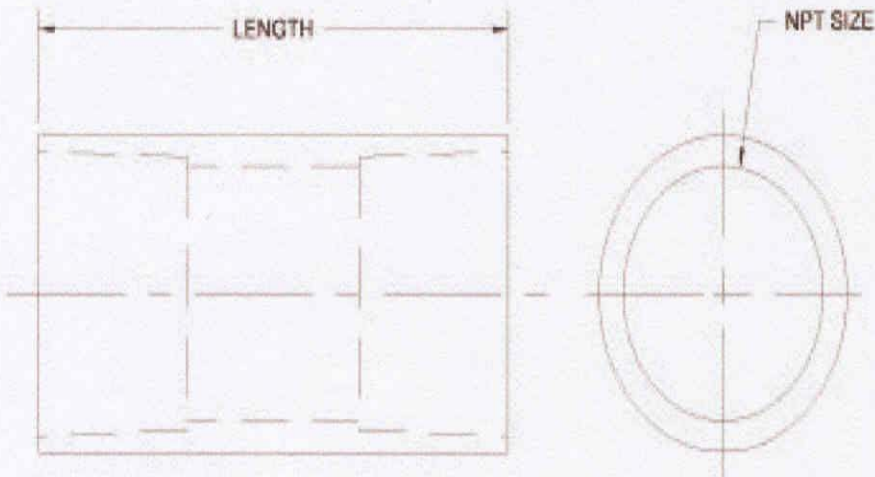

Model	Length	NPT Size
IX-5	2.00" (51 mm)	1/2"
IX-3	2.00" (51 mm)	3/4"
IX-1	2.50" (64 mm)	1"
IX-1-1/4	2.50" (64 mm)	1-1/4"
IX-1-1/2	2.50" (64 mm)	1-1/2"
IX-2	2.50" (64 mm)	2"

## INSULATOR ORDERING INFORMATION

Series	Size (NPT)	Collar Material
IX	-5 = 1/2" -3 = 3/4" -1 = 1" -1-1/4 = 1 1/4" -1-1/2 = 1 1/2" -2 = 2"	-S = 316 Stainless Steel -T = Titanium

**Allied**  
Plating Supplies, Inc.

Allied Plating Supplies, Inc. • 5000 East 10 th Court, Hialeah, FL 33013 • 800-432-8692 Phone, 305-688-5334 Fax  
Email: [info@alliedplating.com](mailto:info@alliedplating.com) • Web Page: [www.alliedplating.com](http://www.alliedplating.com)